

Ready To Order?

1. Full contact details must be provided

- Name
- Phone number
- Clearly marked site address

2. Clear access to the site

- No scaffold
- No bricks
- No rubbish or rubbish bins blocking access

3. A cleared, accessible, and covered area to place the plasterboard

- Area must be under cover, and long enough for flat placement of plasterboard

4. The correct selection of service type

- We offer an inspection service on request to help you select the correct service type. 48 hours notice is required

5. Order deadline

- Order, or change an order by 3.00pm with your merchant for standard delivery the next business day
- 48 hours notice is required for Specialised Delivery

6. Delivery cancellations

- In the event a delivery cannot be made due to site constraints or wet weather, redelivery charges will apply if not cancelled prior to dispatch

7. Customer responsibility

- Customer is responsible for preparing a safe, plasterboard ready site and advising other on site contract parties of expected delivery date and time

Is Your Site Ready?



Not Plasterboard Ready

- Scaffolding obstructing the building access
- Poor housekeeping that may increase the risk of injury
- No clear access for flat placement of plasterboard




Plasterboard Ready

- Good access to the site
- Excellent Housekeeping
- Clear Internal Access

Delivery-to-site (DTS) text alerts

We offer a text service in addition to our current communication channels.

This service is provided through the following communication process.

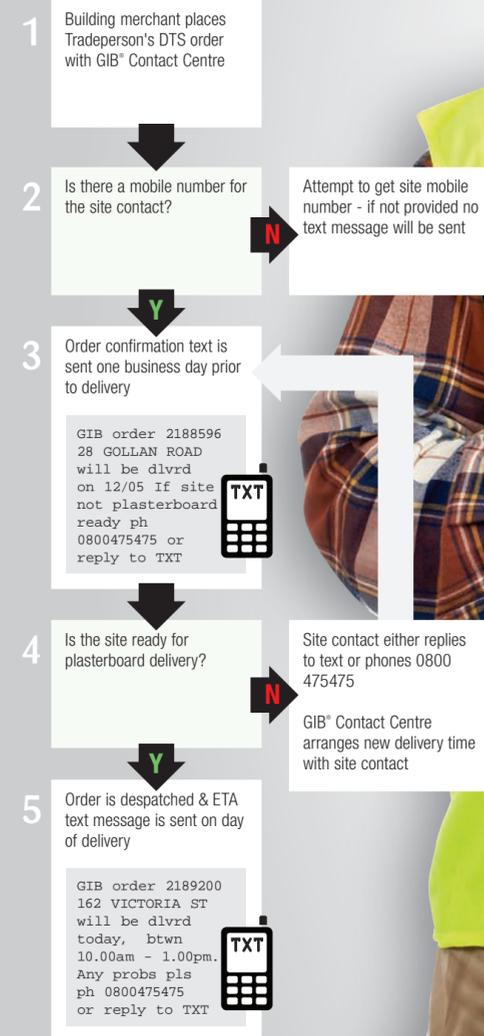

Christchurch GIB® Delivery to Site (DTS) Service Guide



- Specialists in plasterboard placement on site
- Variety of vehicles to suit any delivery type
- Extra labour available on request
- Text message alerts

Packaging

Plasterboard Stretch Wrapping Service



- Plastic cover sheet and stretch wrapped sides applied for weather protection on site

Note: Stretch wrapping a pallet is not a load restraint, it is primarily for weather protection. The wrap is not designed for ultra violet light protection. There is an additional cost for this service.

Plasterboard Strapping Service



- High strength plastic strapping applied for product restraint on pallets. These restraints are used for delivery of plasterboard by cranes to structures over 3 levels high

Note: Ultimately it is the responsibility of the crane operator to ensure the load to be lifted is properly restrained. Load limits per pallet are influenced by the crane lifting capacity. There is an additional cost for this service.

Delivery Situations

Delivery Solutions

Delivery Areas

Winstone Wallboards Site Delivery Guide

Any Doubts?

Does your requirements fall outside these parameters?

Request a complimentary site check.

Need pallets collected from site?

Request pallet collection from your merchant.

Standard delivery

Standard Truck

- Driver and one labourer
- Flat deck truck
- Maximum of 20 paces walk from vehicle to nearest point of covered placement area
- GIB® plasterboard placed in ground floor area or nearest point of cover



Narrow driveway height & weight restriction

Small Truck

- For deliveries with height and width access constraints
- Driver and one labourer



Hiab lifting plasterboard up high (8m to 15m)

Hiab: Small up to 8m, Standard 8m to 15m

- One driver, no additional labour
- Flat deck truck
- Hiab can lift to a maximum of 15m
- Vertical or horizontal lift
- GIB® plasterboard mechanically lifted to the nearest access
- Maximum of 2 hours on site, thereafter hourly rate applies



Multi-storey pass up or carried more than 20 paces

Extra Labour

- Two extra labourers required per level over and above the standard delivery team or Hiab driver
- Required when GIB® plasterboard is required to be placed up stairs, or to be carried greater than 20 paces
- Minimum labour charge of 3 hours for 2 men applies depot to depot



Hiab lifting of plasterboard up high for manual unloading

Hiab Extra Labour

- Extra labourers position the board in house from the end of the crane lift
- Minimum labour charge of 3 hours for 2 men applies depot to depot
- Required when GIB® plasterboard is required to be placed up stairs from a Hiab and to be carried greater than 20 paces



Bulk plasterboard delivery to commercial sites


Crane Lift

- Driver
- Flat deck truck and trailer
- Required when a crane is operating on site
- GIB® plasterboard mechanically off loaded to the nearest access
- Maximum of 2 hours on site, thereafter hourly rate applies
- Weight limits may apply per lift
- Extra labour available



STANDARD DELIVERY

SPECIALISED DELIVERY

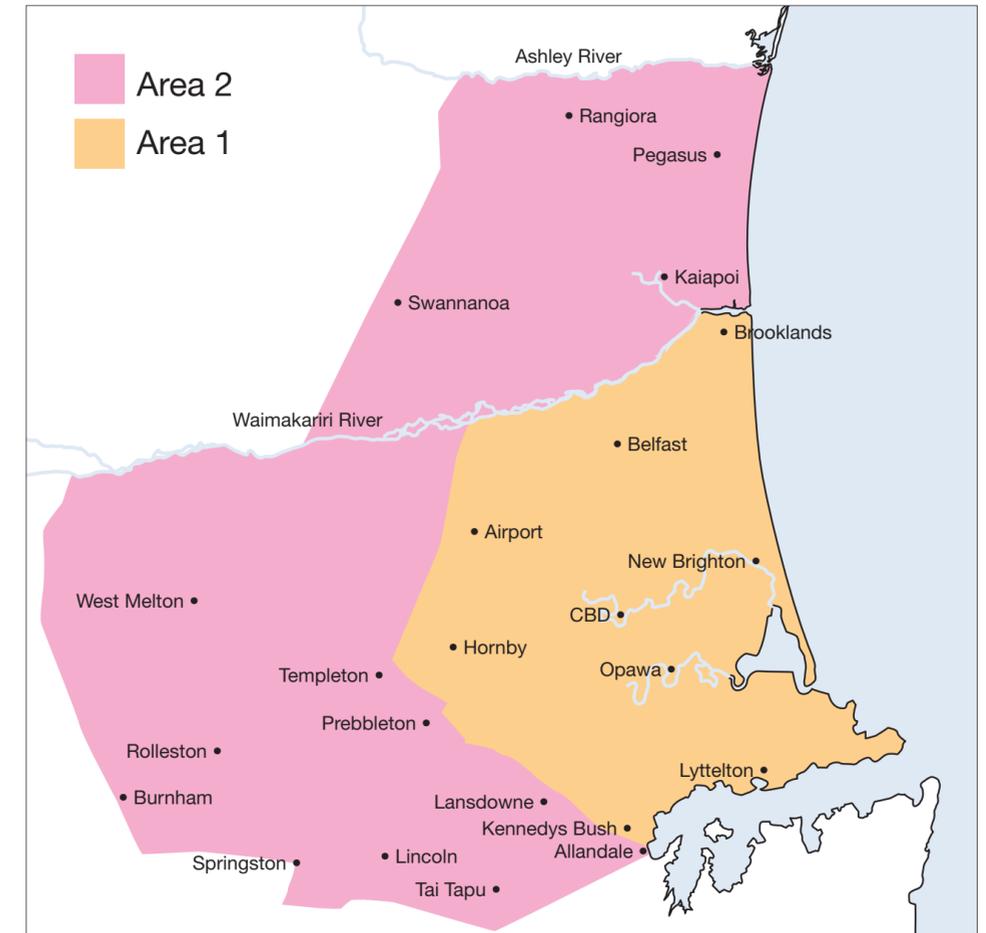

For more information regarding delivery boundaries, additional charges and terms and conditions contact your merchant or contact us at the GIB® Helpline

CALL FREE 0800 475 475

FREE FAX 0800 229 222

Winstone Wallboards Limited

National Support
37 Felix Street, Penrose, Auckland 1061, New Zealand
P O Box 12 256, Penrose 1642, Auckland, New Zealand
Ph: 64-9-633 0100, GIB® Helpline: 0800 100 442
Fax: 64-9-633 0101, Free Fax: 0800 229 222
Email: info@gib.co.nz, Internet Site: www.gib.co.nz

The name GIB® and the shield device are registered trademarks of Fletcher Building Holdings Limited

Copyright © Winstone Wallboards 2011

Printed 09/11 Ref: CBI 5113

