

GIB **Universal Walls – One Way FRR – Timber or Steel Frame** JANUARY 2006

SPECIFICATION NUMBER	LOADBEARING CAPACITY	FIRE RESISTANCE RATING	LINING REQUIREMENTS
GBUW 120	LB/NLB	(120)/120/120	2 x 19mm GIB Fyreline® one side

FRAMING AND WALL HEIGHT

Timber or steel frame designed to meet durability and structural criteria for strength and serviceability under dead and live loads.
The stud width shall be 35mm minimum with a depth of 90mm minimum.
Stud spacing at 600mm centres maximum.
Frame height and dimensions as determined by NZS 3604 stud tables or specific design.

LINING (FIRE SIDE)

2 layers of 19mm GIB Fyreline® to one side of the frame.
Full height sheets shall be used where possible.
Sheets shall be touch fitted.
Offset joints in double layered systems by 600mm.
When sheet end butt joints are unavoidable, they shall be formed over nogs.
All sheet joints must be formed over framing.
In steel framed options, linings are fixed hard to floor.

FASTENING THE LINING

Fasteners


LAYER	TIMBER FRAME	STEEL FRAME
Inner layer	32mm x 6g GIB® Grabber® High Thread Drywall Screws or 40mm x 2.8mm GIB® Nails	32mm x 6g GIB® Grabber® Drywall Self Tapping Screws
Outer layer	51mm x 7g screws as above	51mm x 7g screws as above

Fastener Centres

INNER LAYER: 600mm centres up each stud.
OUTER LAYER: 300mm centres up each stud.
Place fasteners 12mm from sheet edges.

JOINTING

INNER LAYER: Unstopped
OUTER LAYER: All screw heads stopped and all sheet joints tape reinforced and stopped in accordance with the publication entitled "GIB® Site Guide".

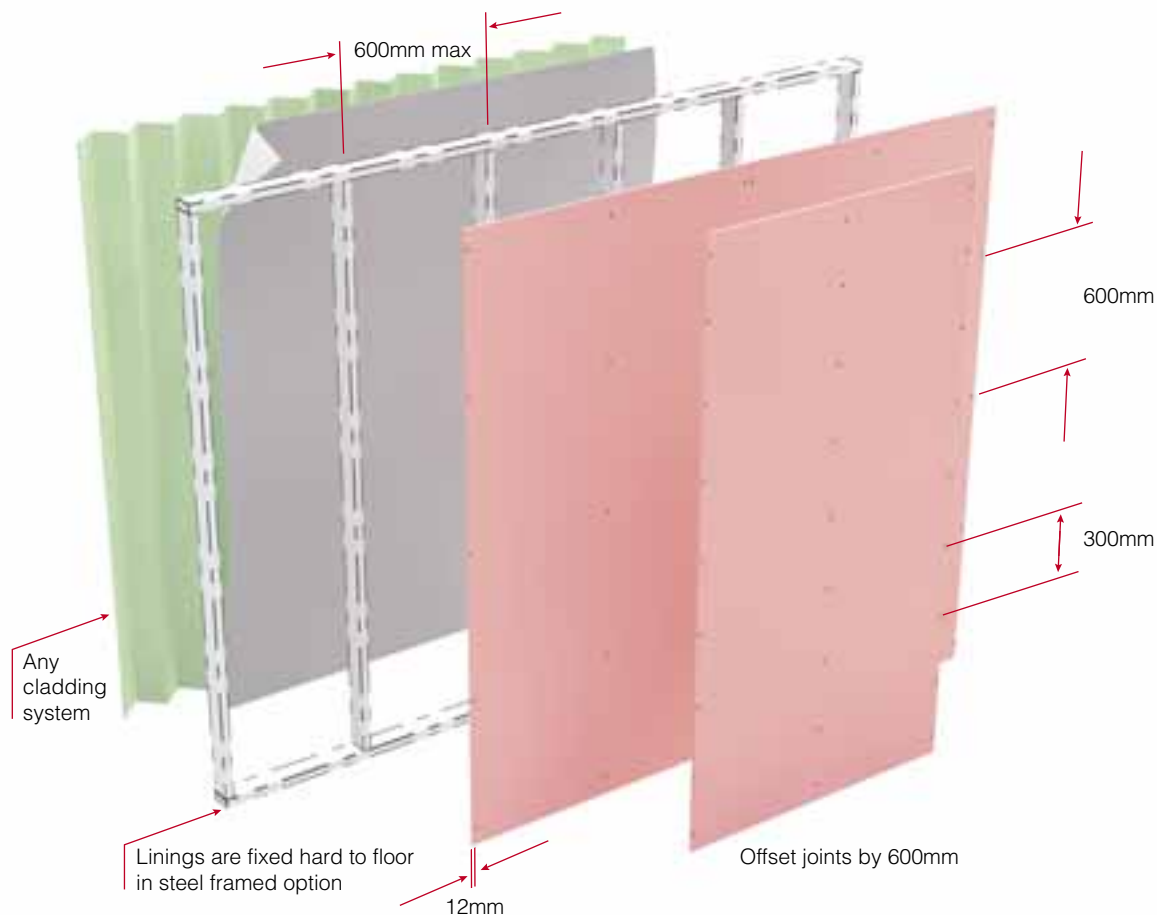

In order for GIB® systems to perform as tested, all components must be installed exactly as prescribed. Substituting components produces an entirely different system and may seriously compromise performance. Follow system specifications.